



Since 1954

Office & Storage Trailers





With a Wells Cargo Behind . . . You Never Look Back!™



Model WW2011


SPECIFICATIONS

	WW1611	WW2011	WW2411	WW1622	WW2022	WW2422	WW2822	WW3222
Body Length	16'0"	20'0"	24'0"	16'0"	20'0"	24'0"	28'0"	32'0"
Overall:								
Length	19'6"	23'6"	27'6"	19'6"	23'6"	27'6"	31'6"	35'6"
Width	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"
Height	9'6"	9'6"	9'6"	9'6"	9'6"	9'6"	9'6"	9'6"
Interior:								
Length	15'9"	19'9"	23'9"	15'9"	19'9"	23'9"	27'9"	31'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Height	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
Platform Height	30"	30"	30"	30"	30"	30"	30"	30"
Number of Axles	1	1	1	2	2	2	2	2
Axle Type	Straight	Straight	Straight	Straight	Straight	Straight	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Tire Size	14.5"	14.5"	14.5"	14.5"	14.5"	14.5"	14.5"	14.5"
Load Range	D	D	D	D	D	D	D	D
Wheel Bolt Pattern	5	5	5	5	5	5	5	5
Hitch Ball Size	2"	2"	2"	2"	2"	2"	2"	2"
Hitch to Top of Ball	19"	19"	19"	19"	19"	19"	19"	19"
Hitch Weight (lb.)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	2320	2600	2900	2620	2900	3200	3500	3800
Curbside Door:								
Width	36"	36"	36"	36"	36"	36"	36"	36"
Height	69"	69"	69"	69"	69"	69"	69"	69"
Rear Doors:								
Type	Double	Double	Double	Double	Double	Double	Double	Double
Width	82"	82"	82"	82"	82"	82"	82"	82"
Height	69"	69"	69"	69"	69"	69"	69"	69"
Under Floor Storage Length	15'10"	19'10"	23'10"	15'10"	19'10"	23'10"	27'10"	31'10"


-  Single Axle Work Wagon®
-  Tandem Axle Work Wagon®



Floorplans

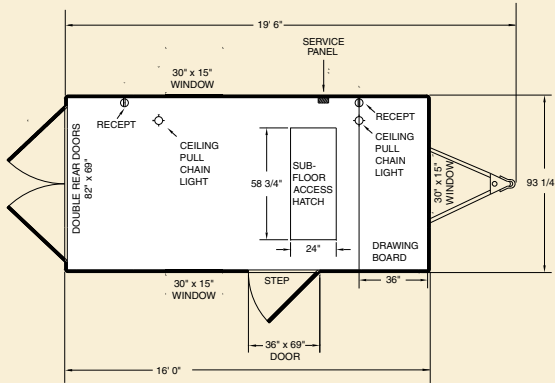


Model WW1611 & WW1622

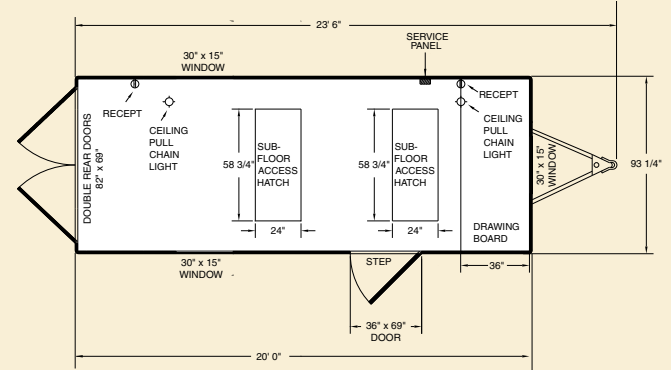


Model WW2011 & WW2022




Underfloor Access & Blue Print Table

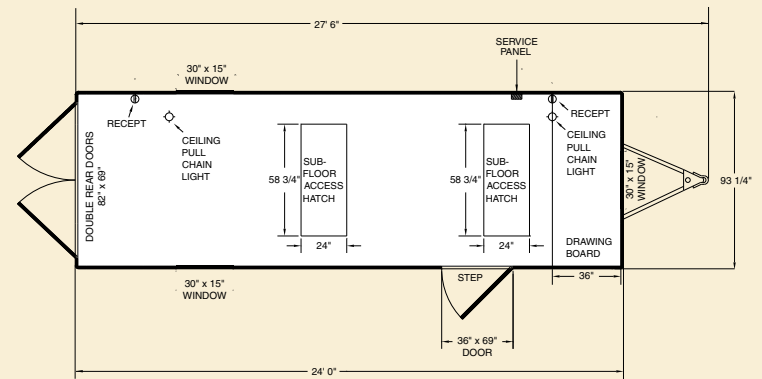

Model WW2411 & WW2422

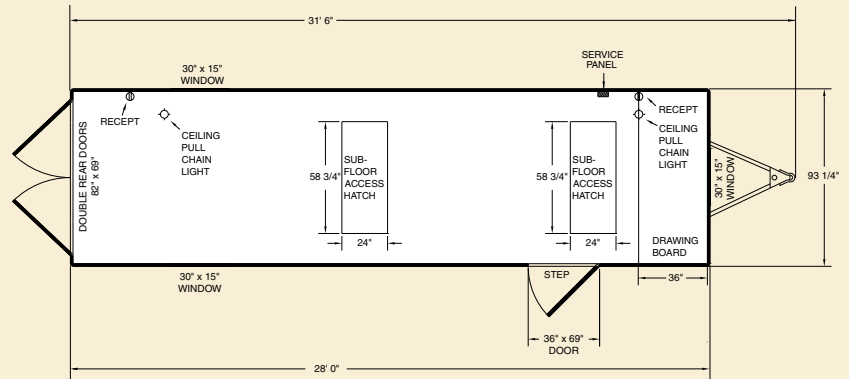

Model WW2822

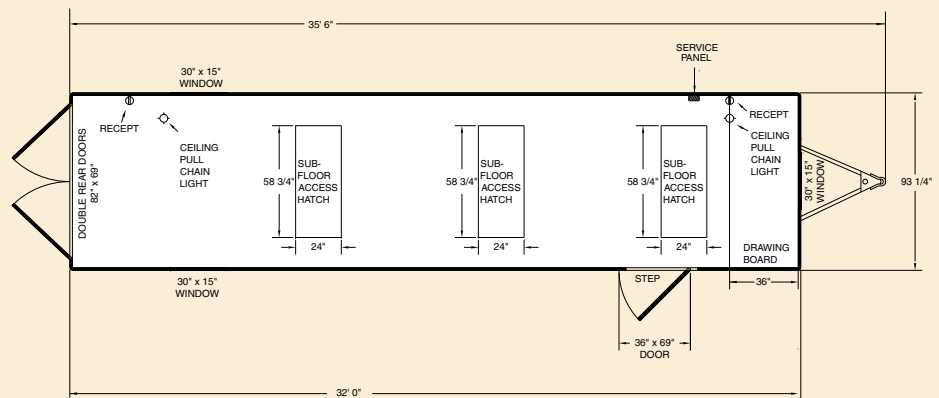

Model WW3222

STANDARD FEATURES

- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Breakaway Switch with Wet Cell Battery
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- 3/4" Exterior Grade Plywood Floors
- 1/4" Plywood Interior Sidewall
- 1/4" Pegboard Tool Panel
- Slider Windows with Screens
- Drawing Board/Blueprint Table
- 30 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles
- 120-Volt Pull Chain Light Fixtures

Specifications subject to change without notice.



Model OW241108

SPECIFICATIONS

	OW241108	OW2411012	OW242208	OW2422012	OW322208	OW3222012
Body Length	24'0"	24'0"	24'0"	24'0"	32'0"	32'0"
Overall:						
Length	27'6"	27'6"	27'6"	27'6"	35'6"	35'6"
Width	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"
Height	10'6"	10'6"	10'6"	10'6"	10'6"	10'6"
Interior:						
Length	23'9"	23'9"	23'9"	23'9"	31'9"	31'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Height (Office)	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"
Height (Shop)	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Platform Height	30"	30"	30"	30"	30"	30"
Number of Axles	1	1	2	2	2	2
Axle Type	Straight	Straight	Straight	Straight	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	Yes	Yes	Yes	Yes	Yes	Yes
Tire Size	14.5"	14.5"	14.5"	14.5"	14.5"	14.5"
Load Range	D	D	D	D	D	D
Wheel Bolt Pattern	5	5	5	5	5	5
Hitch Ball Size	2"	2"	2"	2"	2"	2"
Hitch to Top of Ball	19"	19"	19"	19"	19"	19"
Hitch Weight (lb.)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	3100	3200	3400	3500	4200	4300
Curbside Door:						
Width	36"	36"	36"	36"	36"	36"
Height	80"	80"	80"	80"	80"	80"
Rear Doors:						
Type	Double	Double	Double	Double	Double	Double
Width	82"	82"	82"	82"	82"	82"
Height	80"	80"	80"	80"	80"	80"
Under Floor Storage Length	23'10"	23'10"	23'10"	23'10"	31'10"	31'10"

Single Axle Office Wagon®
 Tandem Axle Office Wagon®



Blue Print Table (Office Area)



Desk (Office Area)

Floorplans







STANDARD FEATURES

- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Breakaway Switch with Wet Cell Battery
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- Slider Windows with Screens
- 3/4" Exterior Grade Plywood Floors
- 1/4" Plywood Interior Sidewall (shop area)
- 1/4" Pegboard Tool Panel (shop area)
- 1/4" Prefinished Paneling (office area)
- 1/4" White Vinyl Ceiling (office area)
- Floor, Wall & Ceiling Insulation (office area)
- Drawing Board/Blueprint Table (office area)
- Desk with File Cabinet (office area)
- Vinyl Linoleum Floors (office area)
- 120-Volt Fluorescent Light Fixture(s) (office area)
- 120-Volt Pull Chain Light Fixture (shop area)
- 50 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles

OPTIONAL ITEMS SHOWN

- Baseboard Heaters (2)

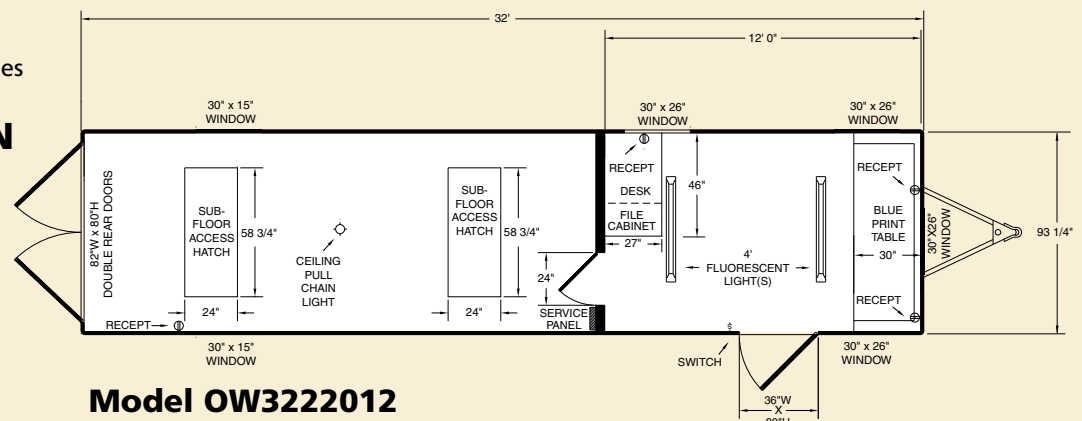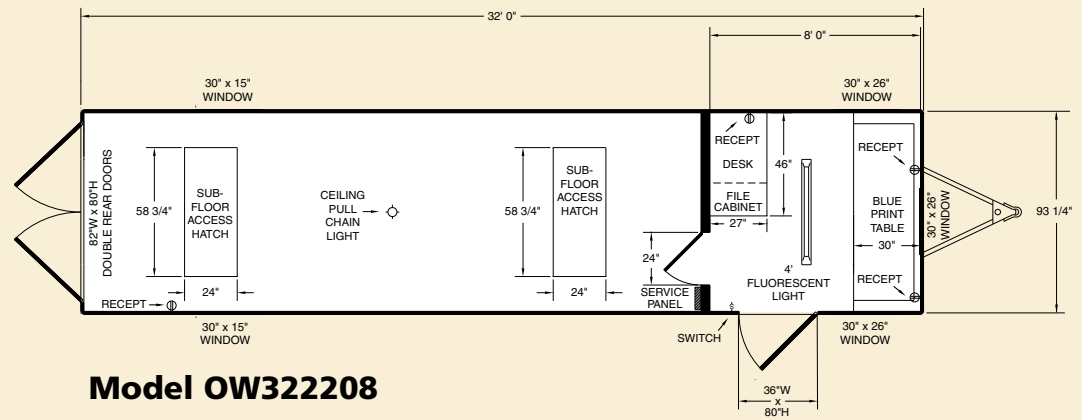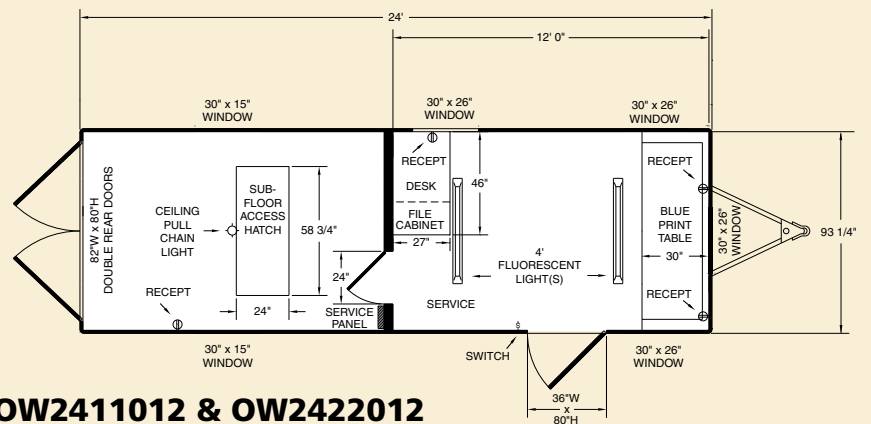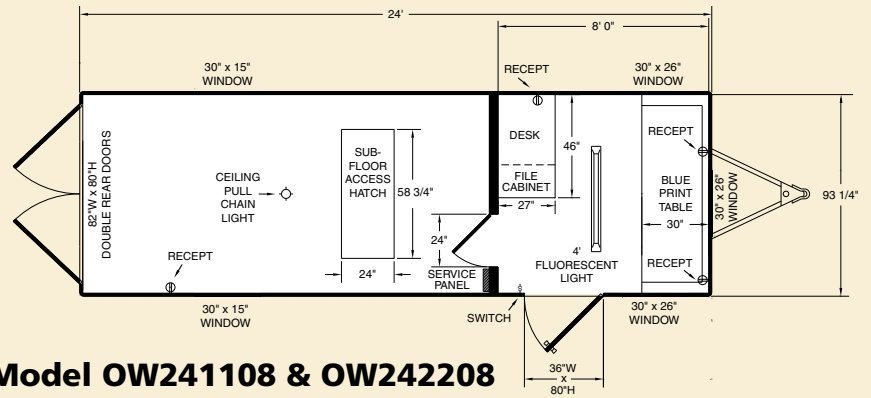



Model F02411

SPECIFICATIONS

	F01611	F02011	F02411	F02611	F03222
Body Length	16'0"	20'0"	24'0"	26'0"	32'0"
Overall:					
Length	19'6"	23'6"	27'6"	29'6"	35'6"
Width	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"
Height	10'6"	10'6"	10'6"	10'6"	10'6"
Interior:					
Length	15'9"	19'9"	23'9"	25'9"	31'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"
Height	7'0"	7'0"	7'0"	7'0"	7'0"
Platform Height	30"	30"	30"	30"	30"
Number of Axles	1	1	1	1	2
Axle Type	Straight	Straight	Straight	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	Yes	Yes	Yes	Yes	Yes
Tire Size	14.5"	14.5"	14.5"	14.5"	14.5"
Load Range	D	D	D	D	D
Wheel Bolt Pattern	5	5	5	5	5
Hitch Ball Size	2"	2"	2"	2"	2"
Hitch to Top of Ball	19"	19"	19"	19"	19"
Hitch Weight (lb.)	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	2480	2850	3220	3400	4550
Curbside Door(s):					
Width	36"	36"	36"	36"	36"
Height	80"	80"	80"	80"	80"
Under Floor Storage Length	15'10"	19'10"	23'10"	25'10"	31'10"

 **Single Axle Field Office**

 **Tandem Axle Field Office**




Front Office




Rear Office


Floorplans

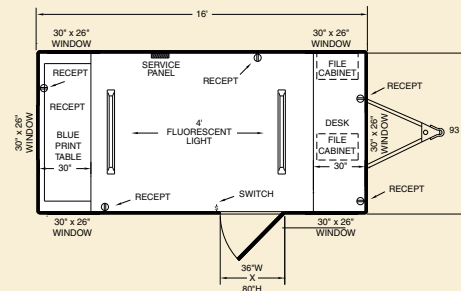


Model FO1611

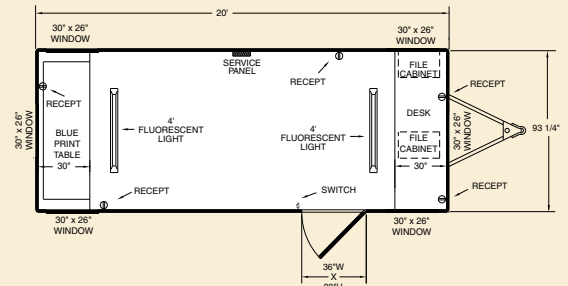


Model FO2011

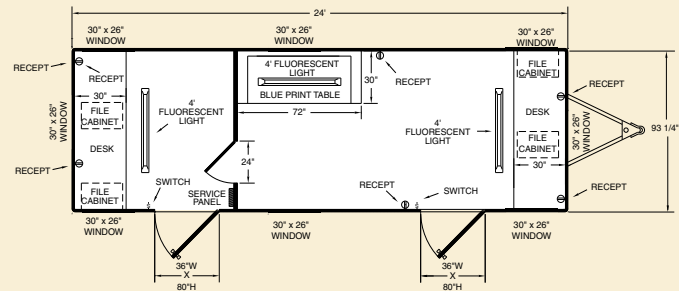


Model FO2411

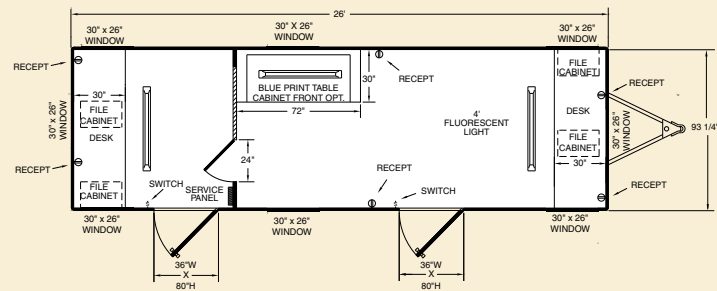

Model FO2611

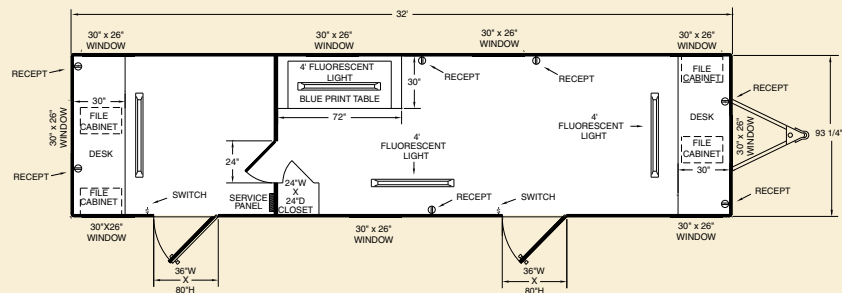

Model FO3222

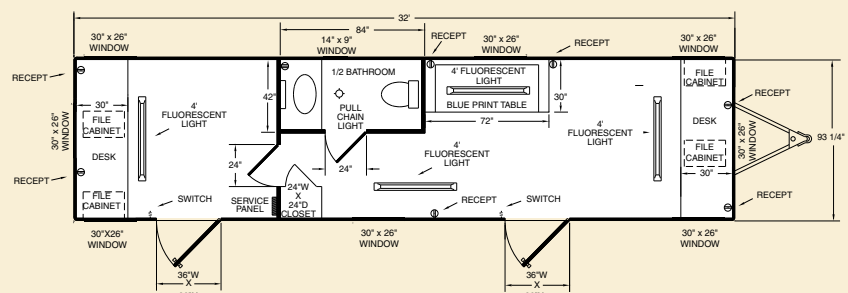

Model FO3222 with optional 1/2 Bath

STANDARD FEATURES

- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- Slider Windows with Screens
- Breakaway Switch with Wet Cell Battery
- 3/4" Exterior Grade Plywood Floors
- 1/4" Prefinished Paneling
- 1/4" White Vinyl Ceiling
- Floor, Wall & Ceiling Insulation
- Drawing Board/Blueprint Table
- Desk with File Cabinet
- Vinyl Linoleum Floors
- 120-Volt Fluorescent Light Fixtures
- 50 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles

OPTIONAL ITEMS SHOWN

- Baseboard Heaters (3)
- Roof Mounted Air Conditioner

Quality Construction — Always One Step Ahead



◀ **12 Volt Electrical System**
All circuits distributed from junction box inside trailer. Easy access to all circuitry. No hidden splices. SAE truck/trailer color coded wire.



◀ **Wet Cell Battery**
Essential part of breakaway system. Applies trailer's full braking capacity for a minimum of 15 minutes meeting D.O.T. requirements. Low voltage indicator light. Up to 100 recharges.

▶ **Exterior Lighting**

Clearance lights, tail lights, brake lights, marker lights and turn indicators meet strict D.O.T. requirements. Molded wiring harness. Sealed beam tail lights with polycarbonate "Diamond Shell" lens. Easy replacement.



▶ **Anodized Roof Cove**

Extruded aluminum Roof Cove (with drip rail) provides extra body support and solid anchoring for roof and prefinished aluminum skin. Special anodizing process assures Roof Cove will maintain a like-new luster for years with minimal maintenance.



◀ **Aluminum Anti-Rack Cam Lock**
Commercial quality cast aluminum Cam Lock and stainless steel hasp deliver a long lasting, no-rust finish for the life of your trailer. Anti-Rack design (forked Cam with "T" shaped Keeper) forms a structural link between door header and footer reducing door movement, frame torque, and road vibration. Better seal compression to prevent moisture penetration.



◀ **Patented Underfloor Storage Compartment**

Unique design allows easy access from exterior fold-down door or from interior lift-up hatch. Great for storing lumber, pipe, conduit, and ladders. Keeps your supplies safe, secure, and protected from the elements.

▶ **Fold-Out Step**

All side door locations include a convenient retractable 20" steel step. A special notched track assures easy use at the job site and secure storage during transit. Slip resistant step surface for safety.



▶ **Corrosion Preventive Measures**

Every Wells Cargo chassis is protected with a laboratory tested Corrosion Preventive Compound (CPC) to deter the accumulation of rust. All exposed steel is painted with a state-of-the-art process including both a primer & urethane topcoat for a smooth, long lasting finish. Also, a special corrosion barrier is applied between the steel frame and exterior aluminum skin to prevent electrolysis.



◀ **Look for the NATM Decal**

Wells Cargo is a proud member of the National Association of Trailer Manufacturers (NATM). Their decal signifies compliance with established industry standards and manufacturing practices. It also certifies your Wells Cargo trailer meets all federal requirements including the Federal Motor Vehicle Safety Standards (FMVSS).



◀ **Solid Support Down The Road**

After you make the decision to buy a Wells Cargo trailer, our commitment to you is not over. Our comprehensive 6-Year "Never Look Back" Warranty Program is more than just words. It's about how quickly and responsibly we respond to your needs. It's the peace-of-mind you get knowing your investment is protected by an established company with a solid reputation.

AUTHORIZED WELLS CARGO DEALER